

Справочник за избор на резервоари / Product choice of tanks for P P18






ориентация на извод P/ pump port P-direction →

резервоар стандартен цилиндричен за помпи P P ... tank standard for pumps P P ...									
3 отвора / with 3 holes M8									
	thikness 2 mm		thikness 0.8 mm		A	B	C	D	E
2 L	2/3	(502-01)	2/3c	(502-02)	130	160	30	85	165
3 L	3/3	(416-01)	3/3c	(416-02)	160	160	40	85	165
5 L	5/3	(418-01)	5/3c	(418-02)	215	185	53	100	165
7 L	7/3	(500-01)	7/3c	(500-02)	245	205	53	115	165
6 отвора / with 6 holes M8									
	thikness 2 mm		thikness 0.8 mm		A	B	C	D	E
2 L	2/6	(502)	2/6c	(502-03)	130	160	30	85	165
3 L	3/6	(416)	3/6c	(416-03)	160	160	40	85	165
5 L	5/6	(418)	5/6c	(418-03)	215	185	53	100	165
7 L	7/6	(500)	7/6c	(500-03)	245	205	53	115	165

резервоар с 6 отвора - външен пръстен V
 tank with 6 holes - outside sealing V
 tank without Hole M18x1.5 - example 2/3cx

резервоар стандартен цилиндричен с за помпи P P ... tank standard type c for pumps P P ...									
3 отвора / with 3 holes M8									
	thikness 0.8 mm		A	B	C	D	E		
3 L	c3/3	533-01	157	160	15	85	165		
4 L	c4/3	533	205	160	15	85	165		

6 отвора / with 6 holes M8									
	thikness 0.8 mm		A	B	C	D	E		
3 L	c3/6	533-02	157	160	15	85	165		
4 L	c4/6	533-03	205	160	15	85	165		

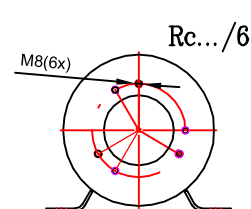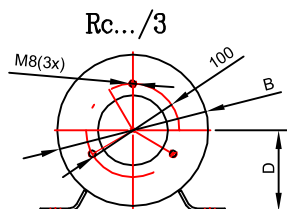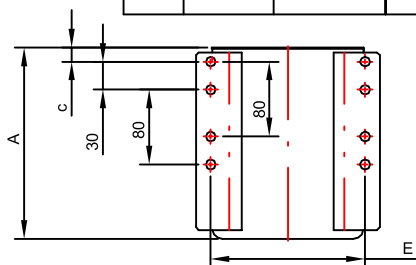

резервоар с 6 отвора - външен пръстен V
 tank with 6 holes - outside sealing V

