



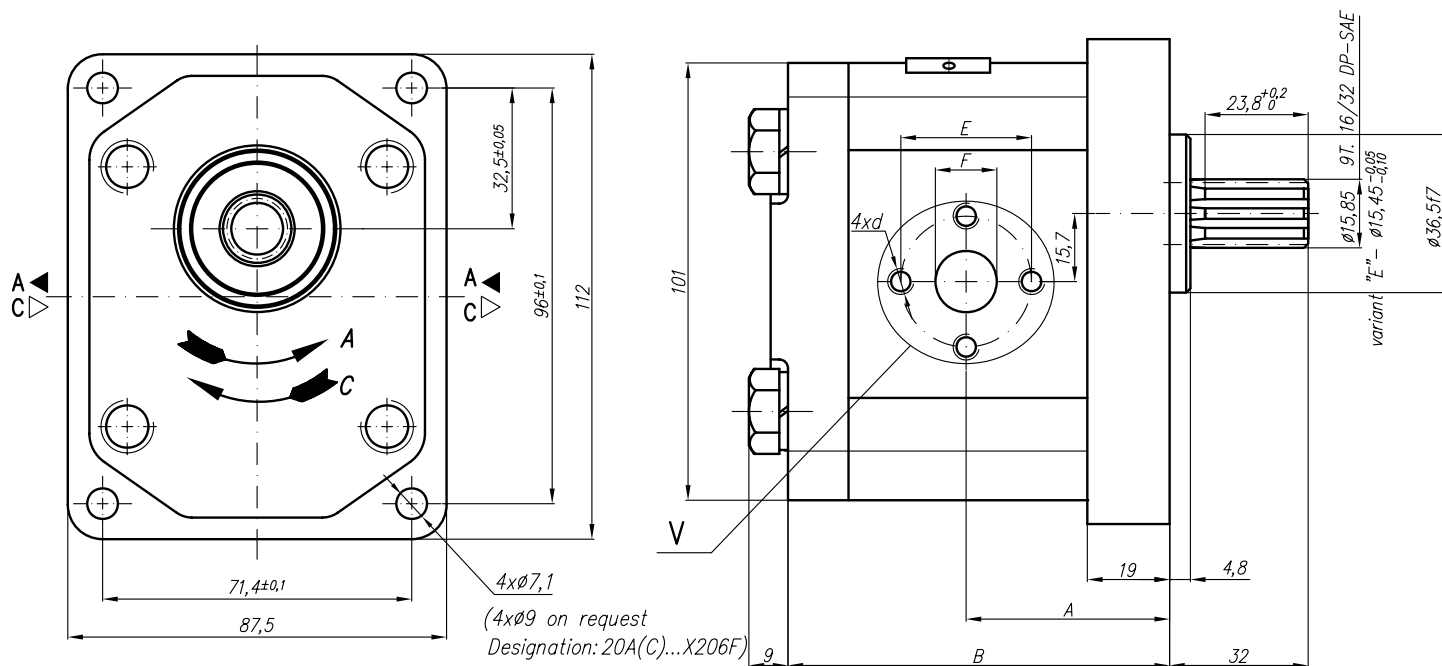

V
 Variants for ports – M;G;U

Designations:

- ...X206 – Normal version (flanges);
- ...X206M – Metric threads;
- ...X206G – GAS threads;
- ...X206U – SAE threads;

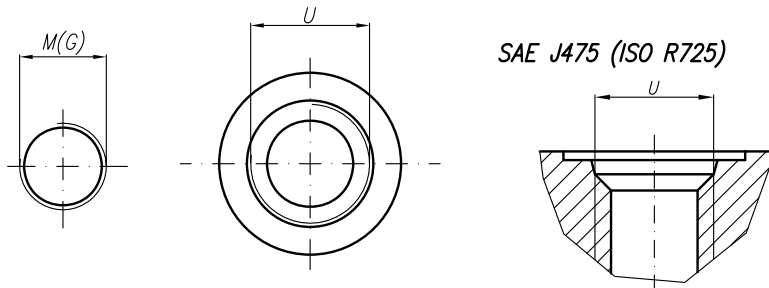

Type	Displacement	Flow		Pressure	max Speed	Dimension													
		at 1500 rpm	at max rpm			P _{nom}	n	A	B	Inlet						Outlet			
	cm ³ /rev	l/min	l/min	bar	rpm	mm	mm	E	F	d	M	G	U	E	F	d	M	G	U
20A(C)4,5X206...	4,5	6,14	14,33	250	3500	42,5	80	30,2	13,1	M6-6H	M20x1,5	G1/2	1 1/16"-12UNF	30,2	13,1	M6-6H	M16x1,5	G1/2	7/8"-14UNF
20A(C)6,3X206...	6,3	8,69	20,29	250	3500	42,5	80												
20A(C)8,2X206...	8,2	11,32	26,40	250	3500	42,5	80												
20A(C)10X206...	10	13,95	32,55	250	3500	47	89												
20A(C)11X206...	11,3	15,76	36,78	250	3500	48	91,1												
20A(C)12X206...	12	16,92	39,48	250	3500	48,6	92,3												
20A(C)14X206...	14	19,95	46,55	250	3500	50	95,4												
20A(C)15X206...	15	21,60	36,00	250	2500	51	96,9												
20A(C)16X206...	16	23,04	38,40	250	2500	52	98,6												
20A(C)19X206...	19	27,36	45,60	200	2500	54	103,5												
20A(C)22X206...	22	31,68	42,24	180	2000	57	108,5												
20A(C)25X206...	25	36,00	48,00	160	2000	59,2	113,4												